PLEXO™

With you, whatever the weather

GLOBAL SPECIALIST IN ELECTRICAL AND
DIGITAL BUILDING INFRASTRUCTURES

legrand®

An **iconic** name,
A **contemporary** design

The go-to range of weatherproof wiring accessories, Plexo has adopted **current trends** with **contemporary lines**.
A design with character.
A strong offer.

Plexo™ style
something to suit every taste

The range has been expanded to **3 finishes** to fit in with every trend in any location.
You will find a colour **to suit all your projects,** both indoors and outdoors.

DOYO

Contemporary

Anthracite

Essential

Grey

Pure

White

DOYO

Plexo™ LEGRAND PATENT

freedom of installation

Plexo has been updated with a redesigned product architecture. Discover the new plate concept with shallow depth and **space** around the mechanism, making **wiring easier.**

DOYO

Guaranteed **ease of installation**

EASY

- Twice as much wiring space.
- Even simpler to install.
- Freedom of movement when wiring or creating tap-offs.

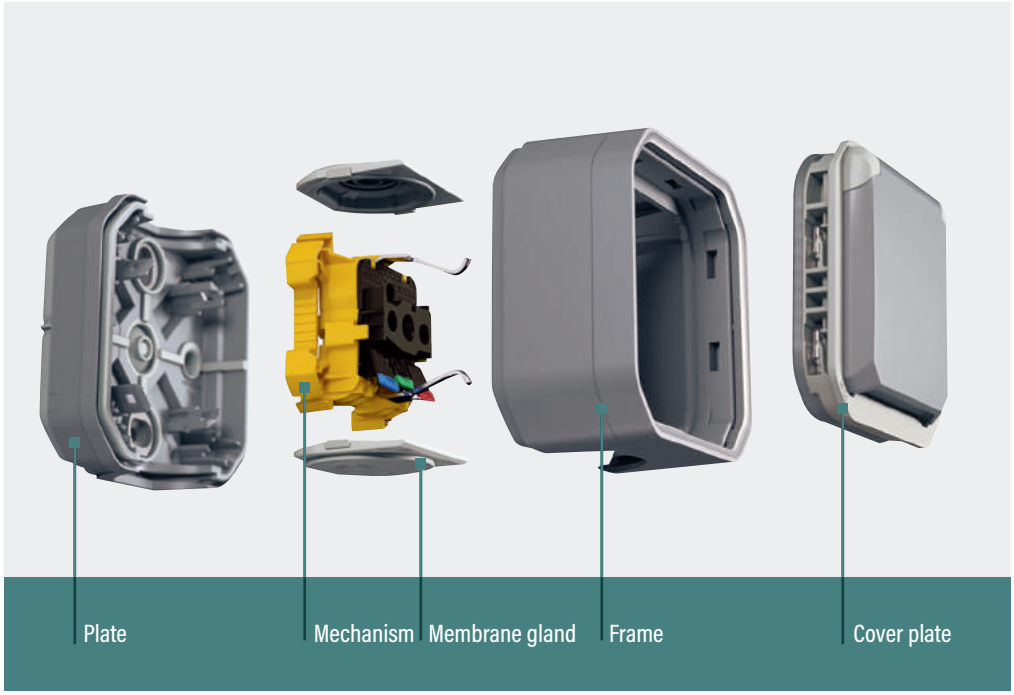

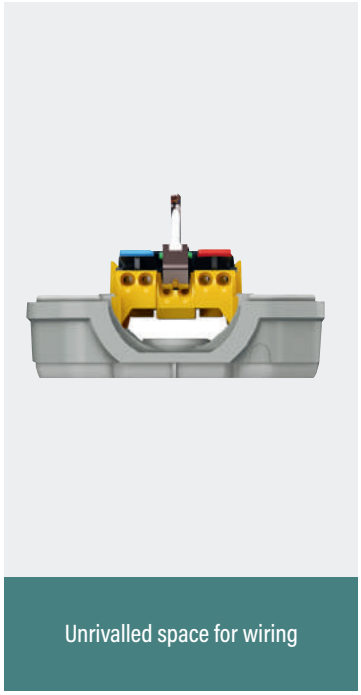

DOYO

Toolless

A movable mechanism.

Clips in and out without tools

Wire up products as you please

2 possible wiring modes.

Mechanism not clipped in place

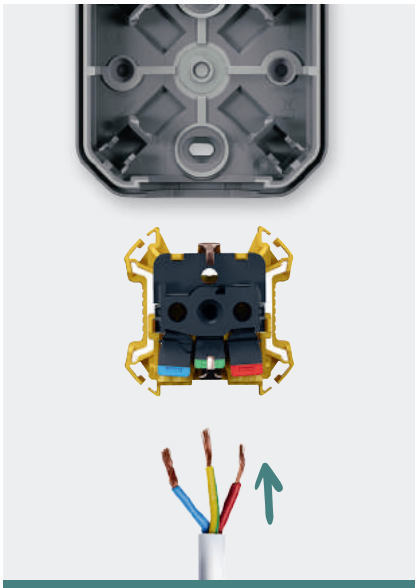

Wiring done off the plate and mechanism simply clips in place.

Mechanism clipped in place

Wiring made easy by the plate's shallow depth.

Plexo™ complete surface mounting IP 55

switches and push-buttons

0 697 22L

0 697 61L

0 697 55L

Mechanisms supplied complete with non-clipped frame

Pack	Cat.Nos	Switches 10 AX - 250 V~
		IP 55 - IK 08. Automatic terminals
		Two-way switch
10	0 697 11L	Grey
10	0 697 61L	Anthracite
10	0 697 51L	White
		Two-way switch - with indicator
		Supplied with 230 V~ lamp to be wired with a terminal block
10	0 697 12L	Grey
10	0 697 21L	Anthracite
		Illuminated two-way switch
		Supplied with 230 V~ lamp to be wired
5	0 697 13L	Grey
5	0 697 36L	Anthracite

Pack	Cat.Nos	2-gang switch/push-button - 10 AX - 250 V~
		IP 55 - IK 08. Automatic terminals Supplied as a 2-gang push-button Allows to create 3 functions: - 2-gang two-way switch - 2-gang changeover push-button - two-way switch + changeover push-button
10	0 697 15L	Grey
10	0 697 75L	Anthracite
10	0 697 55L	White

Pack	Cat.Nos	Push-buttons 10 A
		IP 55 - IK 08. Automatic terminals
		NO contact push-button
10	0 697 20L	Grey
10	0 697 90L	Anthracite
10	0 697 60L	White
		Illuminated NO contact push-button
		Supplied with 230 V~ lamp to be wired
10	0 697 22L	Grey
10	0 697 82L	Anthracite
10	0 697 62L	White

0 697 19L

0 697 26L


0 697 89L

Mechanisms supplied complete with non-clipped frame

Pack	Cat.Nos	Switches 10 AX - 250 V~
		Double pole switch - with indicator
5	0 697 26L	Grey
		Intermediate switch
5	0 697 16L	Grey
5	0 695 21L	Anthracite
5	0 696 20L	White

Pack	Cat.Nos	Reversible transformer
		IP 55 - IK 08. Automatic terminals Allows to create 5 functions: - a two-way switch or changeover push-button - a 2-gang two-way switch or 2-gang changeover push-button - a two-way switch + changeover push-button (left or right) Supplied as a 2-gang changeover push-button with two mounted half cover plates Supplied with 1 cover plate and 2 half cover plates
1	0 697 19L	Grey
1	0 697 89L	Anthracite

Transformer: a **5** in **1** product

5 lighting controls can be created:

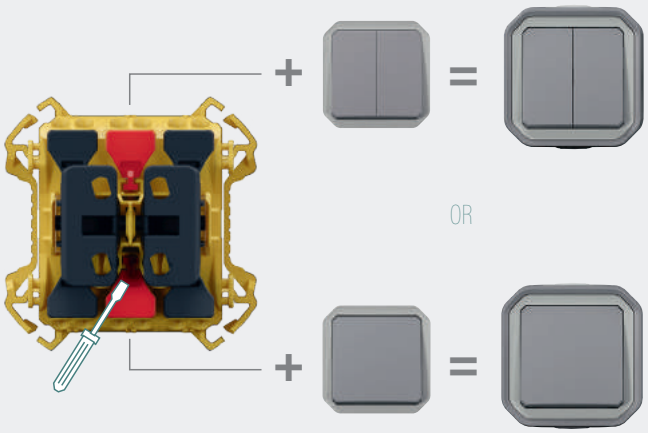

Double push-button

OR

Double two-way switch

OR

Two-way switch + two-way push-button

Push-button

OR

Two-way switch

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ complete surface mounting IP 55

socket outlets

0 697 43L

0 697 31L

0 697 32L

IP 55 - IK 08. Mechanisms supplied complete with non-clipped frame

Pack	Cat.Nos	German standard socket outlets - 16 A - 250 V~
		With shutters for child protection Supplied with 1 membrane gland - 2 outputs
		2P+E socket outlets - automatic terminals
10	0 697 30L	● Grey
10	0 697 99L	● Anthracite
10	0 697 70L	○ White
		2P+E socket outlets - screw terminals
10	0 697 33L	● Grey
10	0 697 83L	● Anthracite
10	0 697 71L	○ White

Pack	Cat.Nos	Prewired German standard socket outlets - 16 A - 250 V~
		Only one connection required
		2 x 2P+E socket outlets - screw terminals
5	0 697 42L	 ● Grey - horizontal mounting
5	0 697 72L	○ White - horizontal mounting
5	0 697 44L	● Grey - vertical mounting
		3 x 2P+E socket outlets - screw terminals
5	0 697 43L	 ● Grey - horizontal mounting
		2P+E socket outlet + 2-way switch - screw terminals
5	0 697 46L	● Grey - horizontal or vertical mounting

IP 55 - IK 08. Mechanisms supplied complete with non-clipped frame

Pack	Cat.Nos	French standard socket outlets - 16 A - 250 V~
		With shutters for child protection Supplied with 1 membrane gland - 2 outputs
		2P+E socket outlets - automatic terminals
10	0 697 31L	● Grey
10	0 697 91L	● Anthracite
10	0 697 81L	○ White

Pack	Cat.Nos	Prewired French standard socket outlets - 16 A - 250 V~
		Only one connection required. Horizontal mounting
		2 x 2 P+E socket outlets - automatic terminals
5	0 697 68L	● Grey
5	0 697 88L	● Anthracite
5	0 697 78L	○ White
		3 x 2 P+E socket outlets - automatic terminals
5	0 697 63L	 ● Grey

Pack	Cat.Nos	British standard socket outlets - 13 A - 250 V~
		Socket outlets - screw terminals
10	0 697 32L	● 2P+E - Grey
10	0 697 39L	● 2 x 2P+E - Grey
10	0 697 50L	● 2P+E + 2-way switch - Grey

		Multistandard socket outlet
		2P+E - screw terminals
10	0 697 48L	● Grey

		Membrane glands with marking of Ø for tubes and cables
		● Grey (RAL 7035)
50	0 919 14	Up to Ø20
50	0 919 15	Up to Ø25

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ complete flush-mounting IP 55

switches and push-buttons

0 698 15L

0 698 20L

0 698 32L


0 698 81L

Mechanisms supplied complete with non-clipped frame, For flush mounting box, please refer to page 20

Pack	Cat.Nos	Switches 10 AX - 250 V~
		Two-way switch - automatic terminals
10	0 698 11L	● Grey
10	0 698 81L	● Anthracite
10	0 698 51L	○ White
		Push-buttons 10 A
		NO contact push-button
10	0 698 20L	● Grey
		Illuminated NO contact push-button
		Supplied with 230 V~ lamp to be wired
10	0 698 32L	● Grey
10	0 698 23L	○ White
		2-gang switch/push-button - 10 AX - 250 V~
		Automatic terminals Supplied as a 2-gang changeover push-button Allows to create 3 functions: - 2-gang two-way switch - 2-gang changeover push-button - two-way switch + changeover push-button
10	0 698 15L	● Grey
10	0 698 55L	○ White

Pack	Cat.Nos	Push-buttons 10 A
		Automatic terminals
		Illuminated changeover push-button with label-holder
		NO + NC contact Supplied with 12 V~ to be wired Can be equipped with 230 V~ lamp Cat.No 0 694 96L
5	0 698 24L	● Grey
5	0 698 54L	● Anthracite
5	0 698 64L	○ White
		Illuminated NO contact push-button
		Supplied with 230 V~ lamp to be wired
10	0 698 32L	● Grey
10	0 698 23L	○ White

DOYO

INNOVATIVE SMART

Push-button mode
Two-way switch mode

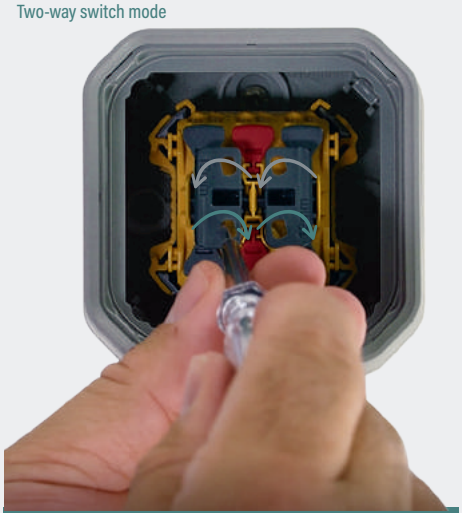

Mode changed with a 1/4 turn

Double switch: a **3** in **1** product

The double switch contains 3 functions:

Double push-button

OR

Double two-way switch

OR

Two-way switch + two-way push-button

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ complete flush-mounting IP 55

socket outlets and cable outlets

0 698 31L

0 698 88L

IP 55 - IK 08. Mechanisms supplied complete
For flush mounting box, please refer to page 20

Pack	Cat.Nos	French standard socket outlet - 16 A - 250 V~
		Automatic terminals 2P+E with shutters for child protection
10	0 698 31L	● Grey
10	0 698 60L	● Anthracite
10	0 698 70L	○ White

		German standard socket outlets - 16 A - 250 V~
		2P+E - screw terminals
10	0 698 33L	● Grey
10	0 698 59L	● Anthracite
10	0 698 69L	○ White

		2P+E - with claws
10	0 698 34L	● Grey
10	0 698 68L	○ White

Pack	Cat.Nos	Cable outlets
		Cable outlet 16 A - 250 V~
		Supplied with cable grip Ø 5 to 13 mm (3 x 2,5²)
10	0 698 48L	● Grey
10	0 698 78L	● Anthracite
10	0 698 88L	○ White

		Cable outlet 20 A with terminal block
		Equipped with 3 entry terminals (2.5 mm²) and 3 front terminals for easy wiring
1	0 698 49L	● Grey
1	0 698 99L	● Anthracite
1	0 698 89L	○ White

		Cable outlet 20 - 32 A
		ISO 32 : Ø12 to 25 mm
1	0 698 50L	● Grey

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ mechanisms IP 55

switches

0 698 00L

0 695 11L

0 696 25L

0 695 26L

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

Pack	Cat.Nos	Reversible transformer
		IP 55 - IK 08. Automatic terminals Allows to create 5 functions: - a two-way switch or changeover push-button - a 2-gang two-way switch or 2-gang changeover push-button - a two-way switch + changeover push-button (left or right) Supplied as a 2-gang changeover push-button with two mounted half cover plates Supplied with 1 cover plate and 2 half cover plates
1	0 695 06L	● Grey
1	0 698 00L	● Anthracite
1	0 696 18L	○ White

Pack	Cat.Nos	Switches 10 AX - 250 V
		IP 55 - IK 08. Automatic terminals
		Two-way switch
10	0 695 11L	● Grey
10	0 698 01L	● Anthracite
10	0 696 11L	○ White
		Two-way switch - with indicator
		Supplied with 230 V~ lamp to be wired with a terminal block
5	0 695 12L	● Grey
5	0 698 02L	● Anthracite
5	0 696 12L	○ White
		Illuminated two-way switch
		Supplied with 230 V~ lamp to be wired
5	0 695 13L	● Grey
5	0 698 03L	● Anthracite
5	0 696 13L	○ White
		Double pole switch
		Becomes illuminated with lamp Cat.No 0 694 96L (p. 40) Indicator version with lamp Cat.No 0 694 98L (p. 40) to be wired with terminal block
10	0 695 30L	● Grey
10	0 698 27L	● Anthracite
10	0 696 27L	○ White

Pack	Cat.Nos	Switches 16 A - 250 V~
		IP 55 - IK 08. Automatic terminals
		Two-way switch
5	0 695 23L	● Grey
		Double pole switch
5	0 695 27L	● Grey
		Double pole switch - with indicator
1	0 695 28L	● Grey Supplied with 230 V~ lamp to be wired with a terminal block

Pack	Cat.Nos	Two-way switch without neutral - with indicator
1	0 695 15L	IP 55 - IK 07 4 AX 60 W mini - 1500 W maxi Supplied with 230 V~ lamp ● Grey

Pack	Cat.Nos	Contactless switches
		200 W LED - for light
1	0 695 86L	● Grey
		1000 VA - for door
1	0 695 95L	● Grey

Pack	Cat.Nos	2-gang switches/push-buttons - 10 AX - 250 V~
		IP 55 - IK 08. Automatic terminals Supplied as a 2-gang push-button Allows to create 3 functions: - 2-gang 2-way switch - 2-gang changeover push-button - two-way switch + changeover push-button
		2-gang two-way switch or 2-gang changeover push-button
10	0 695 25L	● Grey
10	0 698 05L	● Anthracite
10	0 696 25L	○ White
		Illuminated 2-gang two-way switch or 2-gang changeover push-button
		Supplied with 230 V~ lamp to be wired
5	0 695 26L	● Grey
5	0 698 06L	● Anthracite
5	0 696 26L	○ White

Pack	Cat.Nos	Intermediate switch
		IP 55 - IK 07
5	0 695 21L	● Grey
5	0 696 20L	○ White

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ mechanisms IP 55

push-buttons

0 696 30L

0 695 44L

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

Pack	Cat.Nos	Push-buttons 10 A
		IP 55 - IK 08 Automatic terminals
		NO contact push-button
10	0 695 40L	Grey
10	0 698 10L	Anthracite
10	0 696 30L	White
		NO contact push-button - with indicator
5	0 695 33L	Supplied with 230 V~ lamp to be wired with a terminal block Grey
		Illuminated NO contact push-button
		Supplied with 230 V~ lamp to be wired
5	0 695 42L	Grey
5	0 698 13L	Anthracite
5	0 696 32L	White
		Changeover push-button
		NO + NC contact
5	0 695 41L	Grey
5	0 698 41L	Anthracite
5	0 696 31L	White
		Illuminated changeover push-button
		NO + NC contact Supplied with 230 V~ lamp to be wired
5	0 695 36L	Grey
5	0 698 16L	Anthracite
5	0 696 16L	White
		Illuminated changeover push-button with label-holder
		NO + NC contact Supplied with 12 V~ lamp to be wired Can be equipped with 230 V~ lamp Cat.No 0 694 96L (p. 40)
5	0 695 44L	Grey
5	0 698 14L	Anthracite
5	0 696 34L	White

Plexo™ mechanisms IP 55

keyswitches, time lag switch and light sensitive switch

0 695 34L

0 698 04L
+ surface mounting box 0 696 01L

0 695 17L

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

Pack	Cat.Nos	Keyswitches 3 A - 250 V - Ronis n° 455
		Supplied with a set of 2 RONIS keys n° 455 Keys removable in all positions 2 NO contacts
1	0 695 34L	2 positions marked “0 – I” Grey
1	0 695 35L	3 positions marked “I – 0 – II” Grey
		Keyswitch and key-operated push-button "secure access"
		IP 20 - IK 07 10 A - 250 V To be equipped with European key barrel Cat.No 0 697 95
		2-position keyswitch
1	0 697 06L	1 contact - 2 poles Key extracted in central position without changing the status of the contacts Grey
		3-position key-operated push-button
1	0 697 05L	Changeover switch with OFF position Grey
		Accessory
1	0 697 95	European standard key barrel Key extracted in 0 position Supplied with one set of 3 keys
		Illuminated time lag switch 230 V~
		IP 55 - IK 07 Without neutral - 2-wire - screw terminals Lighting or heating control with switch-off timer Possibility to install several time lag switches on the same circuit Supplied with lamp Temporization: 25 s to 15 min. Maximum loads: - 1000 W incandescent - 400 W halogen 130 V - 400 VA ELV halogen lamps - 400 VA fluorescent lamps - 1840 W resistive (heating)
1	0 695 04L	Grey
1	0 698 04L	Anthracite
1	0 696 04L	White
		Light sensitive switch
		IP 55 - IK 08 Screw terminals Can be used to switch a lighting circuit “ON” and “OFF” based on light conditions (nightfall, daybreak) Supplied in one piece, including photoelectric cell Maximum loads: - 1400 W incandescent - 500 VA fluorescent tubes - 200 VA LEDs Adjustable light level threshold: 2 to 1500 lux
1	0 695 17L	Can be combined with all finishes of surface mounting boxes and support frames (p. 39)

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ mechanisms IP 55

motion sensors

0 695 20L

0 401 49

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

Pack	Cat.Nos	Motion sensors
		Sensors without override Compatible with any type of lamp IR detection, detection field 170° Detection range 8 m Time delay setting from 5 s to 30 min Light level threshold setting from 5 to 1275 lux 4 levels of sensitivity setting Stanby consumption : 0.01 W
1	0 695 20L	**Motion sensor, 2 wires, without neutral** Accepted power by lamp type : - LEDs: 2 to 100 W - Compact fluorescent : 2 to 100 W - Halogens, incandescent: 2 to 150 W - LEDs, CFLs, Halogen, fluo tube with ferromagnetic or electronic transformer: 2 to 150 VA If several sensors are installed on the same circuit, the minimum load changes: refer to the technical sheet Possibility to install up to 3 sensors in parallel Additional remote manual control possible with push button, 10 max. Can be associated with a time-lag switch (p. 34) Accepted power by lamp type will be power of the time-lag switch used.
1	0 695 22L	**Motion sensor, 3 wires, with neutral** Accepted power by lamp type : - LEDs: 0 to 500 W - Compact fluorescent: 0 to 500 W - Halogens, incandescent: 0 to 2000 W - LEDs, CFLs, Halogen, fluo tube with ferromagnetic or electronic transformer: 0 to 1000 VA Possibility to install up to 10 sensors in parallel Additional remote manual control possible with push button, 10 max. Master/Slave function available (10 slaves max. for 1 master)

Pack	Cat.Nos	Active power compensator
1	0 401 49	Ensures compatibility of 2-wire electronic lighting controls without neutral with all available types of loads (LEDs, compact fluorescent lamps, ELV halogen lamps with electronic or ferromagnetic ballast, 230 V halogen lamps, fluorescent tubes, incandescent lamps) Standby consumption: 1.2 W

Plexo™ mechanisms IP 55

roller blind and ventilation controls

0 696 29L

0 695 08L

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

Pack	Cat.Nos	Roller blind controls
		IP 55 - IK 06 **Switch** For direct control of 6 AX - 250 V - 500 W max. blind, awning or canopy motor
1	0 695 38L	● Grey
1	0 698 98L	● Anthracite
1	0 696 29L	○ White
		Push-button For controlling 6 A - 250 V - 500 W max. blind, awning or canopy motor by electronic box
1	0 695 39L	● Grey
1	0 696 38L	○ White

Pack	Cat.Nos	Electronic room thermostat
		IP 55 - IK 07 - 250 V~ Ensures the regulation of the temperature in wet premises or specific use (e.g. workshops, laboratories, greenhouses, etc.) Adjustable range from 10°C to 30°C Equipped with a push-button for summer/winter function
1	0 695 08L	● Grey

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ mechanisms IP 55

German standard and British standard socket outlets, cable outlet and blanking plate

0 695 70L

0 695 50L

0 696 37L

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

Pack	Cat.Nos	German standard socket outlets 16 A - 250 V~
		IP 55 - IK 08
		2P+E - automatic terminals
10	0 695 70L	● Grey
10	0 698 71L	● Anthracite
10	0 696 40L	○ White
		2P+E - screw terminals
10	0 695 71L	● Grey
10	0 698 39L	● Anthracite
10	0 696 39L	○ White
		2P+E - key-operated - automatic terminals
1	0 695 74L	● Grey

Pack	Cat.Nos	Prewired German standard socket outlets 16 A - 250 V~
		Automatic terminals One-piece mechanism, only one connection required
		2 x 2P+E - horizontal mounting
5	0 695 76L	● Grey
5	0 698 79L	● Anthracite
5	0 696 75L	○ White
		2 x 2P+E - vertical mounting
5	0 695 77L	● Grey
		3 x 2P+E - horizontal mounting
5	0 695 78L	● Grey

Pack	Cat.Nos	British standard socket outlet 13 A - 250 V~
10	0 695 85L	IP 55 - IK 08 2P+E - screw terminals ● Grey

Pack	Cat.Nos	Cable outlet
5	0 695 50L	IP 55 - IK 08 16 A - 250 V Supplied with cable grip Ø5 to 13 mm (3 x 2,5²) ● Grey

Pack	Cat.Nos	Blanking plate
		Allows to conceal free space Compatible with surface mounting boxes and support frames
5	0 695 37L	● Grey
5	0 698 37L	● Anthracite
5	0 696 37L	○ White

DOYO

Plexo™ mechanisms IP 55

French standard socket outlets

0 695 62L

0 696 43L

0 695 67L

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

French standard socket outlets 16 A - 250 V~

IP 55 - IK 08
Equipped with a flap

2P+E with shutters - automatic terminals

Pack	Cat.Nos	
10	0 695 51L	Grey
10	0 698 91L	Anthracite
10	0 696 21L	White

2P+E with shutters - screw terminals

Pack	Cat.Nos	
10	0 695 52L	Grey
10	0 698 40L	Anthracite
10	0 696 24L	White

2P+E tamperproof - screw terminals

Pack	Cat.Nos	
5	0 695 53L	Grey
5	0 696 23L	White

Tamperproof insert for Cat.Nos 0 695 53L and 0 696 23L

Pack	Cat.Nos	
10	0 502 99	Tamperproof insert for socket Fits directly into the plug

Prewired French standard socket outlets 16 A - 250 V~

IP 55 - IK 08
Automatic terminals
Only one connection required

2 x 2P+E - horizontal mounting

Pack	Cat.Nos	
10	0 695 62L	Grey
10	0 698 42L	Anthracite
10	0 696 42L	White



2 x 2P+E - vertical mounting

Pack	Cat.Nos	
10	0 695 63L	Grey
10	0 698 43L	Anthracite
10	0 696 43L	White



3 x 2P+E - horizontal mounting

Pack	Cat.Nos	
5	0 695 64L	Grey
5	0 698 44L	Anthracite
5	0 696 44L	White



French standard RCD socket outlet 16 A - 250 V~

IP 55 - IK 08
Protects against electric shocks (overload and overvoltage)
Equipped with:
- a 2P+E French standard socket outlet with flap - 16 A - 250 V~ - with shutters for child protection
- a Residual Current Device (RCD) 16 A - 230 V~

30 mA

Pack	Cat.Nos	
1	0 695 67L	Grey

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ mechanisms IP 55

data and TV sokets, adaptors, emergency stop functions and pilot light

0 695 59L


0 695 80L

0 695 81L

0 695 47L

0 695 83L

Mechanisms supplied with cover plate
Installation with surface mounting boxes or flush-mounting support frames (page 18)

Pack	Cat.Nos	RJ 45 data sockets
		IP 55 (with closed flap) - IK 08 ● Grey
5	0 695 59L	Cat. 6_A - STP
5	0 695 69L	Cat. 6 - FTP
5	0 695 61L	Cat. 6 - UTP

Pack	Cat.Nos	TV sockets
		IP 55 - IK 08 For DAB+, DVBT, Cablecast and satellite installation. UHD TV compatible Class A shielded star socket LTE Ready (4G protected) Recommended coaxial cable: 17 VATC Star cabling (1 socket = 1 antenna, splitter or multiswitch) Visual check of the connection Meets EN 50083-4 and EN 50083-2 European directive
		TV-R-SAT
1	0 695 58L	● Grey

Pack	Cat.Nos	Adaptors for 2-module Arteor/Mosaic mechanisms
		Can be equipped with any 2-module Arteor or Mosaic functions (except for specific depths) in order to obtain an IP 55 wiring device
		Adaptor with transparent flap IP 55 - IK 08
10	0 695 80L	● Grey
10	0 698 80L	● Anthracite
10	0 696 95L	○ White
		Adaptor with lockable transparent flap IP 55 - IK 08 Lockable with special tool Cat.No 0 919 45
10	0 695 79L	● Grey
10	0 698 45L	● Anthracite
		Adaptor with opaque flap IP 55 - IK 08
10	0 695 84L	● Grey
10	0 698 30L	● Anthracite
10	0 696 84L	○ White
		Adaptor without flap (IP 20)
10	0 695 82L	● Grey
		Adaptor for RJ 45 socket Ensures IP 44 sealing of the cable when already connected
1	0 695 81L	● Grey

Pack	Cat.Nos	Adaptors for 2-module Arteor/Mosaic mechanisms (continued)
		Adaptor with flexible membrane
10	0 695 87L	Allows to install 2-module Arteor or Mosaic functions (except for specific depths) and to control them by pressing on the flexible membrane while maintaining the IP 55 sealing ● Grey

Pack	Cat.Nos	Accessories
		Security tool
1	0 919 45	Locking tool for adaptors Cat.Nos 0 695 79L and 0 698 45L To be used to remove/tighten vandal-proof screws
		Pen
10	0 395 98	Black felt-tip marker pen Indelebile for marking

Pack	Cat.Nos	Emergency stop functions 3 A - 250 V~
		IP 55 - IK 07 Supplied with "emergency stop" label in 4 languages Yellow cover plate, red button
1	0 695 47L	Emergency stop button 1 NC contact Single pole
1	0 695 48L	Emergency stop with key for reset NO + NC contact Supplied with a set of 2 RONIS keys n°455 Keys removable in 0 position
1	0 695 49L	Emergency stop - stay put 1/4 release NO + NC contact

Pack	Cat.Nos	Adaptor for Osmoz mechanisms
1	0 695 68L	For mounting Ø 22 mm Osmoz control and signalling units with ring ● Grey

Pack	Cat.Nos	Pilot light
		IP 55 - IK 08
		Pilot light
10	0 695 83L	Mechanism integrating LEDs 2 power levels available (0.2 W or 1 W) Screw terminals To be equipped with diffusers Cat.Nos 0 695 88L/89L/90L/91L ◐ Grey/White
		Diffusers for pilot light Grey/White
5	0 695 88L	○ Colorless
5	0 695 89L	● Green
5	0 695 90L	● Orange
5	0 695 91L	● Red

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ mechanisms IP 55

surface mounting boxes and flush-mounting support frames

0 696 01L

0 696 02L

0 696 80L

0 696 98L

To be equipped with modular Plexo mechanisms (page 12 to 17)

For flush mounting boxes refer to page 20

Pack	Cat.Nos	1-gang surface mounting boxes with membrane glands
		Equipped with removable membrane glands 2 membrane glands 1 entry
10	0 696 51L	○ Grey
10	0 696 01L	● Anthracite
10	0 696 89L	○ White

Pack	Cat.Nos	2-gang and 3-gang surface mounting boxes with membrane glands
		No separation between compartments in order to facilitate the cabling operations and to allow the installation of prewired socket outlets
		2-gang - horizontal or vertical mounting 3 membrane glands 1 entry 1 membrane gland 2 entries
5	0 696 72L	○ Grey
5	0 696 02L	● Anthracite
5	0 696 90L	○ White

		3-gang - horizontal or vertical mounting 4 membrane glands 1 entry 1 membrane gland 2 entries
5	0 696 80L	○ Grey
5	0 696 03L	● Anthracite
5	0 696 88L	○ White



Pack	Cat.Nos	Surface mounting boxes for cable glands
		1-gang, 1 entry - PG 16
10	0 696 52L	○ Grey

		1-gang, 1 entry - ISO 20
10	0 696 56L	○ Grey
10	0 696 28L	● Anthracite
10	0 696 86L	○ White

		1-gang, 2 entries - ISO 20
10	0 698 46L	○ Grey

		2-gang, 2 entries - ISO 20 For horizontal or vertical mounting The 2-entry cable gland can be positioned at different locations
5	0 696 68L	○ Grey
5	0 696 10L	● Anthracite
5	0 696 66L	○ White



Pack	Cat.Nos	Flush-mounting support frames
		Used for flush-mounting version for German and French standard boxes only
		1-gang Can be equipped with claws Cat.Nos 0 697 96L/97L
10	0 696 81L	○ Grey
10	0 696 06L	● Anthracite
10	0 696 92L	○ White

		1-gang - with claws
10	0 696 82L	○ Grey
10	0 696 09L	● Anthracite
10	0 696 93L	○ White

		2-gang - horizontal or vertical mounting 71 mm fixing centers
5	0 696 83L	○ Grey
5	0 696 07L	● Anthracite
5	0 696 94L	○ White

		3-gang - horizontal or vertical mounting 71 mm fixing centers
5	0 696 87L	○ Grey
5	0 696 08L	● Anthracite
5	0 696 98L	○ White



DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Plexo™ mechanisms IP 55

membrane glands and accessories

0 695 96L

0 695 99L

0 696 65L


0 696 60L

0 696 50L

0 694 96L

0 694 98L

0 694 95L


0 694 92L

0 695 97L

Pack	Cat.Nos	Membrane glands
10	0 695 96L	**1 entry - Ø up to 25 mm** ● Grey
10	0 695 99L	**2 entries - Ø up to 12.5 mm** ● Grey
10	0 696 65L	**For pairing** Allows to combine surface mounting boxes with one another for an IP 44 installation ● Grey

Pack	Cat.Nos	Cable glands
		For installation on surface mounting boxes (except for Cat.No 0 696 53L)
		1 entry ISO 20
10	0 696 60L	● Grey
10	0 696 63L	● Anthracite
10	0 696 62L	○ White
		1 entry PG 16
10	0 696 48L	● Grey
		2 entries ISO 20
10	0 696 70L	● Grey
10	0 696 73L	● Anthracite
10	0 696 71L	○ White
		2 entries PG 16
10	0 696 50L	● Grey
		PG 16 gland - multidiameter
10	0 696 53L	Ø7 to 14 mm

Pack	Cat.Nos	Lamps to be wired
5	0 694 96L	230 V∿ - 0.2 mA - blue - locator
5	0 694 98L	230 V∿ - 2 mA - blue - indicator
5	0 694 95L	12 to 48 V∿ - 2.6 mA (48 V∿) - blue

Pack	Cat.Nos	Fixing accessories
5	0 694 92L	**1-gang stainless steel height spacer for sandwich panel** Supplied with screw for fixing the product on the height spacer and double insulated caps (Class II) for the wiring accessory
10	0 695 97L	**For thin walls** Does not require a flush-mounting box
10	0 695 98L	**Set of 4 caps** For sealing fixing holes when installing a surface mounting box on a metal support ● Grey

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

Batibox™

flush-mounting boxes for dry partitions and flush-mounting boxes for masonry

0 800 42

0 801 41

Pack	Cat.Nos	
		1-gang boxes
50	0 800 41	**For 1 gang or 2 modules** Drilling diameter 67 mm For wiring accessories using screws or claws
		Multi-gang boxes
		For wiring equipment using screws Drilling diameter 67 mm Supplied with 1 removable divider for accommodating extended functions
30	0 800 42	**For 71 mm fixing centres** 2-gang or 4/5 modules Horizontal or vertical use
30	0 800 43	3-gang or 6/8 modules Horizontal or vertical use
		1-gang boxes for masonry
		Square boxes for joining together For wiring accessories using screws or claws 1-gang boxes can be used to make up multi-gang boxes by joining Can be used horizontally or vertically 71 mm fixing centres Cutting out of internal partitions for mounting extended functions Supplied with screws fitted with protective shield Knockout cable entries, Ø16-20-255 Depth 40 mm
100	0 801 41	

DOYO

Batibox™

flush-mounting boxes for dry partitions

Installation

1

Hole cutter saw Ø67
Box Ø67 mm, more space for cabling

3



Fixing claws adapted to the thickness of the wall
Automatic positioning, even with an electric screwdriver

2

Retractable fixing claws for a better comfort during installation

4



Large space to improve fixing (according to the drilling Ø67 to 68 mm)

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

IP 66 PROTECTION COVER

waterproof cover

6 846 31

6 846 32

Conform to IEC 60526 standard
Surface mounting, to be equipped with British standard wiring accessory ranges
Grey RAL 7035

Pack	Cat.Nos	IP 66 Boxes	
		1 gang	
1	6 846 31		● Grey
		2 gang	
1	6 846 32		● Grey

IP 55 PROTECTION COVER

splashproof cover

6711311G



6711312G

Pack	Cat.Nos	IP 55 Boxes	
		1 gang	
1	6711311G		○ Transparent
		2 gang	
1	6711312G		○ Transparent

Dimensions (mm)

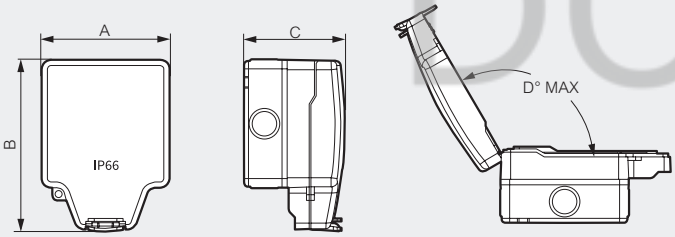

Cat.Nos	A	B	C	D (max)
6 846 31	113.6	151.8	89	120°
6 846 32	169	151.8	89	120°

Principle of use

Easy to install, intuitive opening and closing position

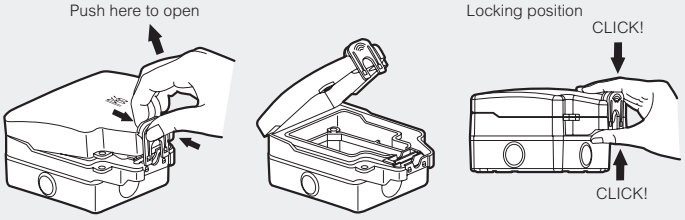

Possibility of adding a padlock

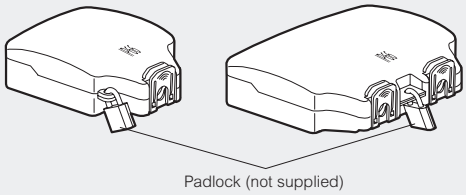

Display photo after install socket

*socket is sold separately

DOYO

Red Cat.Nos: New products
Green Cat.Nos: Products with Certificate of Compliance (COC)

• 商品購買相關事宜，請洽地區經銷代表

legrand

更多商品內容
請上DOYO官網
www.doyo.com.tw

官方網站

注意事項：

1. 由於印刷紙材不同，成品色彩可能略有差異，圖片僅供參考，商品的實際顏色與尺寸請以實物為準。
2. 鐸耀電機保留隨時更新型錄資訊之權利，更新內容不另行通知。

DOYO
鐸耀電機股份有限公司
DRIVING FORCE ELECTRIC CO., LTD
https://www.doyo.com.tw
服務信箱 doyo@doyo.com.tw

台北總公司	新北市新莊區五權一路3號8樓之8	電話 02-8990-3579	傳真 02-8990-3576
台中營業所	台中市西區五權三街36號1樓	電話 04-2376-9988	傳真 04-2376-8855
台南營業所	台南市新市區國際路17號5F-2(A530室)	電話 06-589-2388	傳真 06-589-2077
高雄營業所	高雄市左營區文奇路205號	電話 07-343-7279	傳真 07-343-7269